

Key Features

- TIG Pulse AC/DC with digital control
- Digital display
- Program memory storage
- Easy to use, intuitive control panel
- Pre-post flow time, up/down slope
- Pulse adjustment
- Pulse frequency, pulse duty, arc force, cleaning width
- Remote control interface
- AC function for aluminium and aluminium alloys
- Heavy duty 35-50mm dinse sockets
- DC TIG function for carbon steel, copper and non-ferrous metals
- High speed pulse with precise adjustment for ultimate weld bead
- Generator friendly**

Technical Data

Input Voltage	AC 230V - 50/60 Hz	
I _{eff} (A)	16	
Input Power (kVA)	6.9	
Current Range (A)	TIG 5 - 200	MMA 10 - 160
Duty Cycle @ 40°C	TIG 200A @ 25%	MMA 160A @ 30%
No-Load Voltage (V)	60	
Efficiency (%)	85	
Power Factor	0.7	
Protection/Insulation Class	IP21S/B	
Dimensions (LxWxH mm)	435 x 160 x 340	
Weight (Kg)	9	




The Jasic TIG 200P AC/DC mini is a technologically advanced single phase inverter power source offering an ultra-portable solution. The innovative and user-friendly control panel offers a digital weld cycle, welding modes and a program memory feature for storing different welding parameters.

The excellent technical characteristics of the 200 AC/DC make it an ideal choice for professionally qualified TIG welders that require precise and reliable performance.

Options Accessories

Part Number	Description
* EC-2-03LD	Work Return Lead & Clamp
TIG-50ERGO	T26 4m Torch
TIG-50-10KERGO	T26 4m Torch c/w 10K Pot
TIG-50FLEXIERGO	T26F 4m Torch
TIG-50-FLEXI10KERGO	T26F 4m Torch c/w 10K Pot
TIG-50-8M-10KERGO	T26F 8m Torch c/w 10K Pot
TIG-50-8MERGO	T26 8m Torch
TIG-50-8MFLEXIERGO	T26F 8m Torch
TIG-50-8MFLEXI-10KERGO	T26F 8m Torch c/w 10K Pot
WC-2-03LD	Electrode Lead 3m
JSS-01	Shoulder Strap
JIT-01	Trolley
JFC-05	Foot Control

* Comes as Standard

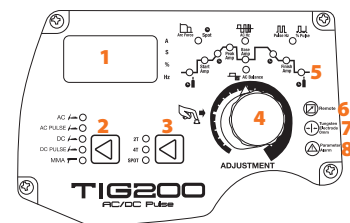

- | | |
|-------------------------------|-------------------------|
| 1 Digital Display | 5 Welding Parameters |
| 2 Process Selection Switch | 6 Local Remote Function |
| 3 2T/4T/Spot Selection Switch | 7 Tungsten Size |
| 4 Multi Function Control Dial | 8 Parameter Alarm |